



TSM28-2-45M-55M

28CELL

Mono PERC Module

45M-55Wp

Power Output Range

1000VDC

Maximum System Voltage

17.6 %

Maximum Efficiency

KEY SALIENT FEATURES

- 

Global, Tier 1 manufacturer brand, with independently certified state-of-the-art automated manufacturing
- 

Industry leading lowest thermal co-efficient of power
- 

Excellent low irradiance performance
- 

Excellent PID resistance
- 

Dual stage 100% EL Inspection warranting defect-free product
- 

Module Imp binning radically reduces string mismatch losses
- 

Excellent wind load 2400Pa & snow load 5400Pa under certain installation method
- 

Comprehensive product and system certification

 - ◆ IEC61215:2016; IEC61730-1/-2:2016;
 - ◆ ISO 9001:2015 Quality Management System
 - ◆ ISO 14001:2015 Environmental Management System
 - ◆ ISO 45001:2018 Occupational Health and Safety Management System

About Twinsel

Founded in 2002, Twinsel is a leading, excellent manufacturer of solar modules and solar off-grid systems. In 2022 its annual production capacity of solar modules reaches 2GW, Twinsel is committed to providing our customers with a wide range of services from consulting, scouting the site, design construction, financing to smart transportation. Our dream is to turn the desert into an oasis and the night into light, Bring our customers better price, more stable quality and better use experience.


No.5 Xiayang Road, Taoyuan Street, Ninghai County,
Ningbo City, Zhejiang Province
Tel:+86-574-59953157 Fax:+86-574-5995395
E-mail: tony@twinsel.com Website:www.twinsel.com

LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty / 25 year Linear Power Warranty



Dimensions of PV Module Unit: mm

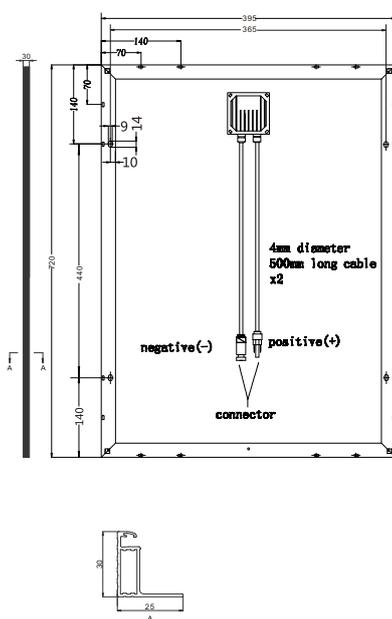

ELECTRICAL DATA(STC)

Model Number	TSM28-2-45M	TSM28-2-50M	TSM28-2-55M
Rated Power in Watts-Pmax(Wp)	45	50	55
Open Circuit Voltage-Voc(V)	19.95	20.3	20.65
Short Circuit Current-Isc(A)	2.8	3.06	3.28
Maximum Power Voltage-Vmpp(V)	17	17.25	17.6
Maximum Power Current-Imp(A)	2.65	2.91	3.13
Module Efficiency(%)★	15.8	17.6	19.3

STC: Irradiance 1000W/m², Cell Temperature 25 °C, Air Mass AM 1.5 according to EN 60904-3.
 ★Module Efficiency(%):Round-off to the nearest number



ELECTRICAL DATA(NMOT)

Model Number	TSM28-2-45M	TSM28-2-50M	TSM28-2-55M
Maximum Power Pmax(Wp)	34.1	37.9	41.7
Open Circuit Voltage-Voc(V)	18.55	18.88	19.2
Short Circuit Current-Isc(A)	2.3	2.51	2.69
Maximum Power Voltage-Vmpp(V)	15.79	16.01	16.35
Maximum Power Current-Imp(A)	2.16	2.37	2.55

NMOT: Irradiance at 800W/m², Ambient Temperature 20 °C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Monocrystalline
Cell configuration	28 cells (2x14)
Module dimensions	720x395x30mm
Cables	4.0mm ² (12AWG) ,Positive (+) ,Negative (-) 500mm (Connector Included)
Substrate	White Back-sheet
Connector	Twinsel PV-SY02, IP68
J-Box	SY012,IP68,1000VDC, 2 Schottky bypass diodes
Weight	3.5kg
Frame	Anodized Aluminium Alloy type 6005-2T6

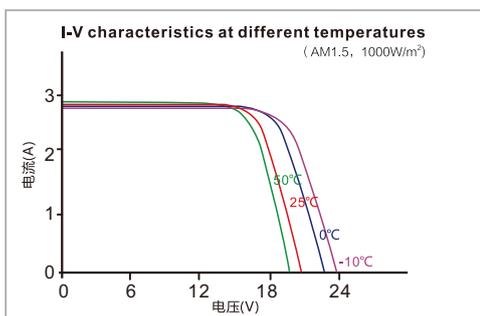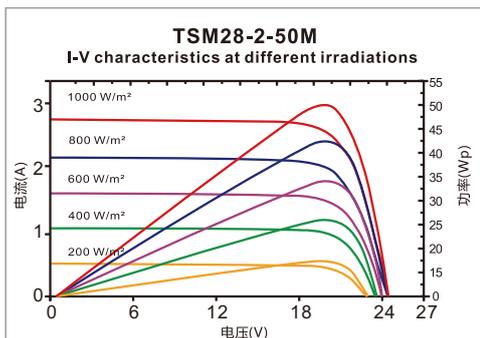

TEMPERATURE&MAXIMUM RATINGS

Nominal Module Operating Temperature(NMOT)	44 °C ± 2 °C
Temperature Coefficient of Voc	-0.25%/ °C
Temperature Coefficient of Isc	0.04%/ °C
Temperature Coefficient of Pmax	-0.34%/ °C
Operational Temperature	-40 °C ~ +85 °C
Maximum System Voltage	1000VDC
Max Series Fuse Rating	10A
Limiting Reverse Current	10A

PACKAGING CONFIGURATION

	40ft(HQ)Aluminum Frame
Number of modules per container	5470
Number of modules per pallet	2
Number of modules per container	2735
Packaging box dimensions(L × W × H) in mm	740x80x420
Box gross weight [kg]	7.5

Our Partners: